

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 058 406 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.12.2000 Bulletin 2000/49

(51) Int Cl.7: H04B 7/005, H04L 25/03

(21) Application number: 00304366.8

(22) Date of filing: 23.05.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Haratsch, Erich Franz  
Bradley Beach, NJ 07720 (US)  
• Viswanathan, Harish  
Somerset NJ 07920 (US)

(30) Priority: 04.06.1999 US 326785

(71) Applicant: LUCENT TECHNOLOGIES INC.  
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:  
Watts, Christopher Malcolm Kelway, Dr. et al  
Lucent Technologies (UK) Ltd,  
5 Mornington Road  
Woodford Green Essex, IG8 0TU (GB)

(54) Method and apparatus for reducing the computational complexity and relaxing the critical path of reduced state sequence estimation (RSSE) techniques


(57) A method and apparatus are disclosed for reducing the complexity of reduced state sequence estimation (RSSE) techniques for a given number of states while also reducing the critical path problem. The signal energy of a pulse that has gone through a minimum-phase channel is concentrated in the initial taps. A communications channel is represented using a discrete time model, where the channel impulse response has a memory length,  $L$ , denoted by

$$\{f_k\}_{k=0}^L$$

where  $f_k$  is the coefficient for channel tap  $k$ . Taps one through  $U$  are referred to as the initial taps, and taps  $U+1$  through  $L$  are referred to as the tail taps, where  $U$

is a prescribed number. The less significant tail taps are processed with a lower complexity cancellation algorithm, such as a decision-feedback equalizer (DFE) technique, that cancels the tail taps using tentative decisions. Thereafter, only the more significant initial taps are processed with a reduced state sequence estimation (RSSE) technique. The DFE technique initially removes the intersymbol interference associated with the tail taps, then the RSSE technique (or M-algorithm (MA)) is applied only to the more important tail taps. Taps one through  $U$  are processed using the RSSE technique and taps  $U+1$  through  $L$  are processed with the lower complexity decision-feedback equalizer (DFE). A receiver is disclosed that includes a tentative decision/tail processing circuit, such as a decision-feedback equalizer (DFE) technique, for processing the less significant tail taps and an RSSE circuit for processing the initial taps.

FIG. 2

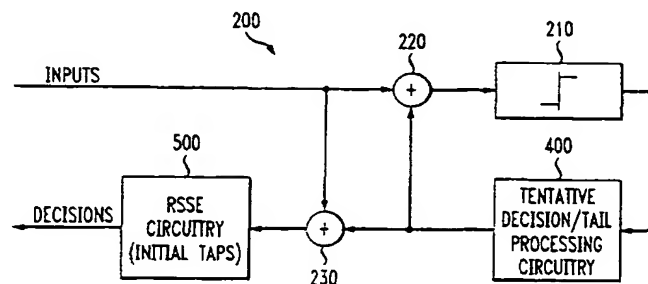

## Description

### Field Of The Invention

[0001] The present invention relates generally to channel equalization and decoding techniques, and more particularly, to sequence estimation techniques with reduced complexity.

### Background Of The Invention

[0002] The transmission rates for local area networks (LANs) that use twisted pair conductors have progressively increased from 10 Megabits-per-second (Mbps) to 1 Gigabit-per-second (Gbps). The Gigabit Ethernet 1000 Base-T standard, for example, operates at a clock rate of 125 MHz and uses four copper pairs to transmit 1 Gbps. Trellis-coded modulation (TCM) is employed by the transmitter, in a known manner, to achieve asymptotic coding gains. The signals arriving at the receiver are typically corrupted by intersymbol interference (ISI), crosstalk, echo, and noise. A major challenge for receivers in such a channel environment is to jointly equalize the channel and decode the corrupted trellis-coded signals at such high clock rates. As the high processing speed requires a parallel implementation without resource sharing, managing hardware complexity becomes difficult. Another issue is to meet the speed requirements, as the algorithms for joint equalization and decoding incorporate non-linear feedback loops which cannot be pipelined.

[0003] Data detection is often performed using maximum likelihood sequence estimation (MLSE), to produce the output symbols or bits. A maximum likelihood sequence estimator (MLSE) considers all possible sequences and determines which sequence was actually transmitted, in a known manner. The maximum likelihood sequence estimator (MLSE) is the optimum decoder and applies the well-known Viterbi algorithm to the combined code and channel trellis. For a more detailed discussion of a Viterbi implementation of a maximum likelihood sequence estimator (MLSE), see Gerhard Fettweis and Heinrich Meyr, "High-Speed Parallel Viterbi Decoding Algorithm and VLSI-Architecture," IEEE Communication Magazine (May 1991), incorporated by reference herein.

[0004] The computation and storage requirements of the Viterbi algorithm are proportional to the number of states. The number of states of the combined trellis is given by  $S \times 2^{mL}$ , where  $S$  is the number of code states,  $m$  is the number of bits for each information symbol, and  $L$  is the length of the channel memory. For the Gigabit Ethernet standard, for example,  $S = 8$ ,  $m = 8$ , and  $L = 10$ , which leads to a prohibitively expensive Viterbi algorithm with about  $10^{25}$  states.

[0005] In order to manage the hardware complexity for the maximum likelihood sequence estimator (MLSE) that applies the Viterbi algorithm, a number of sub-opti-

mal approaches, such as "reduced state sequence estimation (RSSE)" algorithms, have been proposed or suggested. For a discussion of reduced state sequence estimation (RSSE) techniques, see, for example, P. R. Chevillat and E. Eleftheriou, "Decoding of Trellis-Encoded Signals in the Presence of Intersymbol Interference and Noise", IEEE Trans. Commun., vol. 37, 669-76, (July 1989) and M. V. Eyuboglu and S. U. H. Qureshi, "Reduced-State Sequence Estimation For Coded Modulation On Intersymbol Interference Channels", IEEE JSAC, vol. 7, 989-95 (Aug. 1989), each incorporated by reference herein.

[0006] Generally, reduced state sequence estimation (RSSE) techniques reduce the complexity of the maximum likelihood sequence estimators (MLSE) by merging multiple states of the full combined channel/code trellis. Although RSSE techniques reduce the number of states for Viterbi decoding, the required computations are still too complex at the high clock rates associated with the Gigabit Ethernet standard, as the high processing speeds require a parallel implementation without resource sharing. In addition, the RSSE technique incorporates non-linear feedback loops which cannot be pipelined. The critical path associated with these feedback loops is the limiting factor for high-speed implementations. Simplifying the RSSE technique by further reducing the number of states or by doing separate equalization with a decision-feedback equalizer (DFE) and decoding of the TCM codes comes often with a significant penalty in terms of signal-to-noise ratio (SNR) performance. As apparent from the above-described deficiencies with conventional reduced state sequence estimation (RSSE) algorithms, a need exists for a reduced state sequence estimation (RSSE) algorithm that reduces the hardware complexity of RSSE techniques for a given number of states and also relaxes the critical path problem.

### Summary Of The Invention

[0007] Generally, a method and apparatus are disclosed for reducing the complexity of the RSSE technique for a given number of states while also relaxing the critical path problem. A communications channel is represented using a discrete time model, where the channel impulse response has a memory length,  $L$ , denoted by  $\{f_k\}_{k=0}^L$ , where  $f_k$  is the coefficient for channel tap  $k$ . The signal energy of a pulse that has gone through a minimum-phase channel is concentrated in the initial taps. As used herein, taps one through  $U$  are referred to as the initial taps, and taps  $U+1$  through  $L$  are referred to as the tail taps, where  $U$  is a prescribed number. In one implementation, the tap number,  $U$ , is selected to ensure that the initial taps contribute a predefined percentage of the overall signal energy.

[0008] According to one aspect of the invention, the less significant tail taps ( $U+1$  through  $L$ ) are processed with a lower complexity cancellation algorithm, such as

**[0009]** A receiver is disclosed that includes a tentative decision/tail processing circuit for processing the less significant tail taps and an RSSE circuit for processing the initial taps. The tentative decision/tail processing circuit processes the less significant tail taps with a lower complexity DFE algorithm, to cancel the tail taps using tentative decisions. The RSSE circuit processes only the initial taps with the RSSE technique.

[001 0]

FIG. 5 illustrates an implementation of the reduced state sequence estimation (RSSE) circuitry of FIG. 2.

[0011] FIG. 1 shows the block diagram for a conventional receiver 100 in a channel environment associated with, for example, the Gigabit Ethernet 1000 Base-T standard. A major challenge for such receivers 100 is to jointly equalize the channel and decode the corrupted trellis-coded signals at the high clock rates of the Gigabit

**[0014]** FIG. 2 is a schematic block diagram of a receiver 200 in accordance with the present invention. The receiver 200 includes a slicer 210 that slices the digital data into symbol values. In addition, the receiver 200 includes tentative decision/tail processing circuitry 400, discussed further below in conjunction with FIG. 4, for processing the less significant tail taps with a lower complexity cancellation algorithm, such as a decision-feed-

back equalizer (DFE) technique, to cancel the tail taps using tentative decisions. The receiver 200 also includes RSSE circuitry 500, discussed further below in conjunction with FIG. 5, for processing only the initial taps with a reduced state sequence estimation (RSSE) technique (FIG. 5).

[0015] FIG. 4 illustrates a decision-feedback equalizer (DFE) implementation of the tentative decision/tail processing circuitry 400 of FIG. 2. As shown in FIG. 4, a feedback filter (FBF2) 410 takes tentative decisions obtained from a DFE structure (FBF) 400 and removes the less significant intersymbol interference (ISI) introduced by the tail channel taps  $\{f_k\}_{k=U+1}^L$ , where  $K \leq U \leq L$ . The remaining severe intersymbol interference (ISI) introduced by only the initial channel taps  $\{f_k\}_{k=1}^U$ , is then treated in the RSSE circuitry 500.

[0016] When  $U = L$ , the output of the feedback filter (FBF2) 410 does not affect the input to the RSSE circuitry 500 such that the structure operates like a full reduced state sequence estimator (RSSE). If  $K$  is the number of taps that are accounted for in the combined code and channel state inside the RSSE circuitry 500, then choosing  $U = K$  leads to a structure, where feedback filter (FBF2) 410 cancels all intersymbol interference which is not accounted for in the combined code and channel state. It is again noted that the design parameter  $U$  can be chosen to trade-off performance and hardware complexity.

[0017] The lower the value for the threshold,  $U$ , the less complex the decision feedback unit (DFU) in the RSSE circuitry 500, discussed below, as less intersymbol interference taps are accounted for in each decision feedback cell (DFC). However, this comes at the expense of a signal-to-noise ratio (SNR) penalty due to error propagation effects in the feedback filter (FBF2) 410. Low values for  $U$  also relax the critical path problem in the feedback loop inside the RSSE circuitry 500 as the number of terms which have to be added in the decision feedback cell (DFC) is proportional to  $U$ . The critical path inside the RSSE circuit, consisting of the decision-feedback cell (DFC), branch metric cell (BMC), add-compare-select cell (ACSC) and survivor memory cell (SMC), as shown in FIG. 5, is the bottleneck for high speed implementations of the RSSE technique. The tentative decision/tail processing circuitry 400, according to FIG. 2, is not part of the critical path.

[0018] In many practical situations, where the channel is minimum-phase, which can be accomplished with a feed forward equalizer (FFE), a low value of  $U$  is sufficient to achieve approximately the same bit error rate (BER) versus signal-to-noise ratio (SNR) performance as a conventional RSSE circuit, which cancels the intersymbol interference introduced by all  $L$  channel taps. However, the present invention reduces the computational complexity of the decision-feedback unit (DFU)  $L/U$  times. In addition, computational delay through the decision feedback cell (DFC) (FIG. 5) is reduced  $L/U$  times so that the critical path problem is relaxed signif-

icantly as well. The present invention also allows for a survivor depth  $D$  of the survivor memory unit (SMU), which is smaller than  $L$ . In a conventional RSSE circuit, the survivor depth  $D$  must be at least  $L$ , as the  $L$  past survivor symbols are needed for the computations in the decision feedback unit (DFU). Thus, the present invention also allows for a hardware reduction of the survivor memory unit (SMU) (FIG. 5).

[0019] In the case of decision-feedback sequence estimation (DFSE), which is a specialization of the RSSE technique, and  $U = K$ , the decision feedback unit (DFU) and thus the feedback loop is removed and the decision-feedback sequence estimation (DFSE) becomes a pure Viterbi decoder. Thus, for this special case of decision-feedback sequence estimation (DFSE) with  $U$  equal to  $K$ , the present invention permits pipelining in all processing blocks outside the add-compare-select unit (ACSU), and the critical path reduces to one add-compare-select cell (ACSC).

[0020] While the tentative decision/tail processing circuitry 400 has been implemented in FIG. 4 using a decision-feedback equalizer (DFE), the tentative decision/tail processing circuitry 400 could likewise be implemented using a soft DFE approach. For a discussion of soft DFE techniques, see, for example, S.L. Ariyavistakul and Y. Li, "Joint Coding and Decision Feedback Equalization for Broadband Wireless Channels", IEEE Journal on selected Areas in Communications, vol. 16, no. 9, Dec. 1998, incorporated by reference herein.

[0021] As previously indicated, FIG. 5 illustrates the reduced state sequence estimation (RSSE) circuit of FIG. 2 which processes only the initial taps of the channel impulse response. As previously indicated, reduced state sequence estimation (RSSE) techniques reduce the complexity of the maximum likelihood sequence estimators (MLSE) by merging multiple states of the full combined channel/code trellis. For a more detailed discussion of conventional reduced state sequence estimation (RSSE) techniques that process all taps of the channel impulse response, see, for example, P. R. Chevillat and E. Eleftheriou, "Decoding of Trellis-Encoded Signals in the Presence of Intersymbol Interference and Noise", IEEE Trans. Commun., vol. 37, 669-76, (July 1989) and M. V. Eyuboglu and S. U. H. Qureshi, "Reduced-State Sequence Estimation For Coded Modulation On Intersymbol Interference Channels", IEEE JSAC, vol. 7, 989-95 (Aug. 1989), each incorporated by reference above.

[0022] Reduced state sequence estimation (RSSE) considers only partial information about the information symbol for the reduced combined trellis. The resulting reduced combined state is expressed as

$$\rho_n = (\sigma_{n-K}; X_{n-K}^{m_K}, \dots, X_{n-1}^{m_1})$$

where  $X_{n-i}^{m_i}$  contains the  $m_i$  bits of the information symbol

$X_{n-i}$  which are considered for the reduced trellis. It is required that  $m \leq m_K \leq m_{K-1} \leq \dots \leq m_1 \leq m$ , where  $m$  is the number of information bits which are sent into the convolutional encoder of the TCM encoder. The reduced trellis has  $S = S \times 2^{m_1 + \dots + m_K}$  states.

[0023] FIG. 5 shows a block diagram for reduced state sequence estimation (RSSE) which is also valid for its specializations, decision-feedback sequence estimation (DFSE) and PDFE.  $S$  soft output values are computed by the  $s$ ' decision-feedback cells (DFC) in the decision-feedback unit (DFU) based on the survivors in the survivor memory unit (SMU) and fed into the branch metric unit (BMU), in which each branch metric cell (BMC) computes the metrics for the  $b = 2^m$  transitions emanating from the corresponding state. Each decision-feedback cell (DFC) takes  $L$  past symbols from the corresponding survivor memory cell (SMC).

[0024] Decision-feedback sequence estimation (DFSE) is a specialization of reduced state sequence estimation (RSSE) and employs a trellis that takes into account only the first  $K$  of the  $L$  channel coefficients  $\{f_k\}$ ,  $0 \leq K \leq L$ . The combination of the code state and truncated channel state defines the reduced combined state  $\mu_n = (\sigma_{n-K}, X_{n-K}, \dots, X_{n-1})$ , where  $\sigma_n$  is the code state at time  $n$ , and  $X_{n-K}, \dots, X_{n-1}$  are the  $k$  previously sent information symbols. Intersymbol interference terms not represented in the combined state are estimated and subtracted in the metric computation using the path history of each state. A special case arises when  $K = 0$ , where the reduced trellis becomes the TCM code trellis and decision-feedback equalization is performed for each code state based on the survivor history of that path. This is called parallel decision-feedback equalization (PDFE). Decision-feedback sequence estimation (DFSE) follows from reduced state sequence estimation (RSSE) with  $m_1 = \dots = m_K = m$ .

[0025] In an alternate implementation, the RSSE circuit 500 may be replaced by an M-algorithm (MA). The M-algorithm (MA) techniques work on the complete combined trellis, but retain at each processing step only  $M$  paths with the best metrics. For a discussion of M-algorithms (MA), see, for example, N. Seshadri and J. B. Anderson, "Decoding of Severely Filtered Modulation Codes Using the (M,L) Algorithm", IEEE JSAC, vol. 7, 1006-1016 (Aug. 1989), incorporated by reference herein.

[0026] Generally, the M-algorithm (MA) uses  $M$  DFEs to cancel the intersymbol interference for the  $M$  best paths. At each processing cycle, each of these  $M$  paths is extended by its  $b = 2^m$  extensions, then the resulting  $bM$  paths are tested for duplicate paths and sorted to find the  $M$  best paths. The M-algorithm (MA) is not as inherently parallel as the reduced state sequence estimation (RSSE) implementation shown in FIG. 5 or the Viterbi algorithm itself, as the testing and sorting operation in the add-test-sort unit (ATSoU) is performed over all  $bM$  path extensions. Each decision-feedback cell (DFC) takes  $L$  past symbols from the corresponding sur-

vivor memory cell (SMC).

[0027] In the alternate embodiment, the M-algorithm (MA) would process the combined trellis that results from the concatenation of the TCM code and a channel with the first  $U$  taps of the channel impulse response. The tail of the channel impulse response would be processed with a lower complexity cancellation algorithm as discussed above.

[0028] It is to be understood that the embodiments and variations shown and described herein are merely illustrative of the principles of this invention and that various modifications may be implemented by those skilled in the art without departing from the scope of the invention.

#### Claims

1. A method for processing a signal received from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, said method comprising the steps of:

processing less significant taps with a lower complexity cancellation algorithm that cancels the less significant taps using tentative decisions; and

processing more significant taps with a reduced state sequence estimation (RSSE) technique.

2. The method according to claim 1, wherein said lower complexity cancellation algorithm is a decision-feedback equalizer (DFE) technique.

3. The method according to claim 1, wherein said lower complexity cancellation algorithm is a soft decision-feedback equalizer (DFE) technique.

4. The method according to claim 1, wherein said lower complexity cancellation algorithm reduces the intersymbol interference associated with said less significant taps.

5. The method according to claim 1, wherein said more significant taps comprise taps below a tap number,  $U$ , where  $U$  is a prescribed number less than  $L$ .

6. The method according to claim 1, further comprising the step of sampling said signal.

7. The method according to claim 1, further comprising the step of digitizing said signal.

8. The method according to claim 1, wherein said reduced state sequence estimation (RSSE) technique is a decision-feedback sequence estimation

(DFSE) technique.

9. The method according to claim 1, wherein said reduced state sequence estimation (RSSE) technique is a parallel decision-feedback equalization (PDFE) technique. 5
10. A receiver that receives a signal from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, comprising: 10
  - a tentative decision/tail processing circuit for processing less significant taps with a lower complexity cancellation algorithm; and 15
  - a reduced state sequence estimation (RSSE) circuit for processing only the more significant taps. 20
11. The receiver according to claim 10, wherein said tentative decision/tail processing circuit implements a decision-feedback equalizer (DFE) technique to cancel said less significant taps using tentative decisions. 25
12. The receiver according to claim 10, wherein said lower complexity cancellation algorithm is a soft decision-feedback equalizer (DFE) technique. 30
13. The receiver according to claim 10, wherein said lower complexity cancellation algorithm reduces the intersymbol interference associated with said less significant taps. 35
14. The receiver according to claim 10, wherein said more significant taps comprise taps below a predefined tap number,  $U$ , where  $U$  is less than  $L$ . 40
15. The receiver according to claim 10, wherein said reduced state sequence estimation (RSSE) circuit employs a decision-feedback sequence estimation (DFSE) technique. 45
16. The receiver according to claim 10, wherein said reduced state sequence estimation (RSSE) circuit employs a parallel decision-feedback equalization (PDFE) technique. 50
17. A method for processing a signal received from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, said method comprising the steps of: 55
  - processing less significant taps with a lower complexity cancellation algorithm that cancels the less significant taps using tentative decisions; and

processing more significant taps with an M-algorithm (MA) technique.

18. A receiver that receives a signal from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, comprising:
  - a tentative decision/tail processing circuit for processing less significant taps with a lower complexity cancellation algorithm; and
  - a sequence estimation circuit that implements an M-algorithm (MA) for processing only the more significant taps.
19. A method for processing a signal received from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, said method comprising the steps of:
  - processing less significant taps with a first algorithm of first complexity; and
  - processing more significant taps with a second algorithm of second complexity that is greater than said first complexity.
20. A receiver that receives a signal from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, comprising:
  - a processing circuit that processes less significant taps with a first algorithm of first complexity; and
  - a processing circuit that processes more significant taps with a second algorithm of second complexity that is greater than said first complexity.
21. A receiver that receives a signal from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, comprising:
  - means for processing less significant taps with a first algorithm of first complexity; and
  - means for processing more significant taps with a second algorithm of second complexity that is greater than said first complexity.
22. A receiver that receives a signal from a dispersive channel, said channel having a memory length,  $L$ , and being modeled as a filter having  $L$  taps, comprising:

means for processing less significant taps with a lower complexity cancellation algorithm that cancels the less significant taps using tentative decisions; and

5

means for processing more significant taps with a reduced state sequence estimation (RSSE) technique.

10

15

20

25

30

35

40

45

50

55

FIG. 1

PRIOR ART

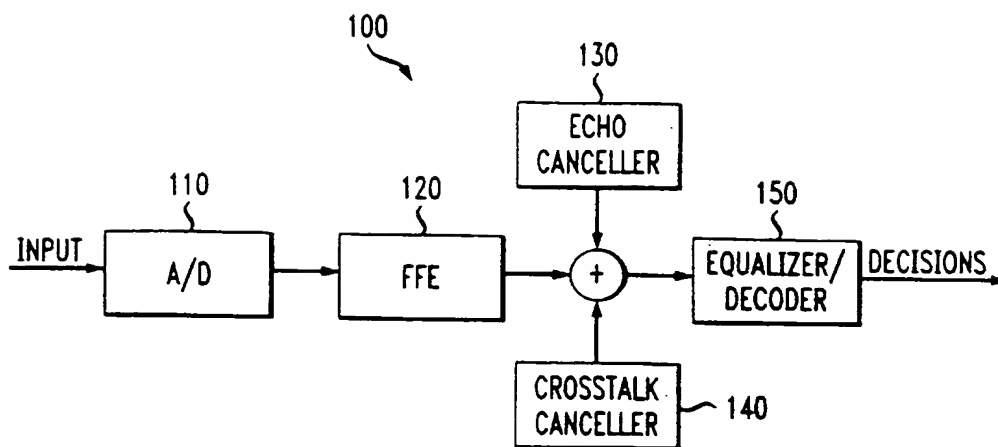


FIG. 2

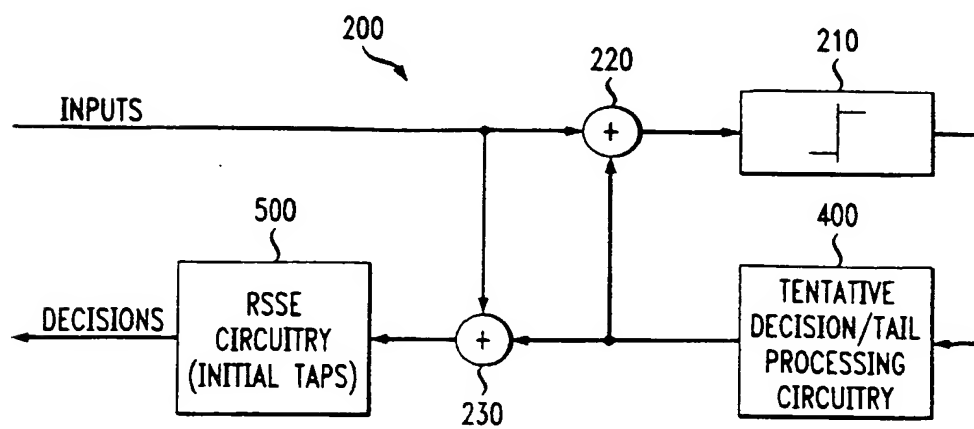




FIG. 3


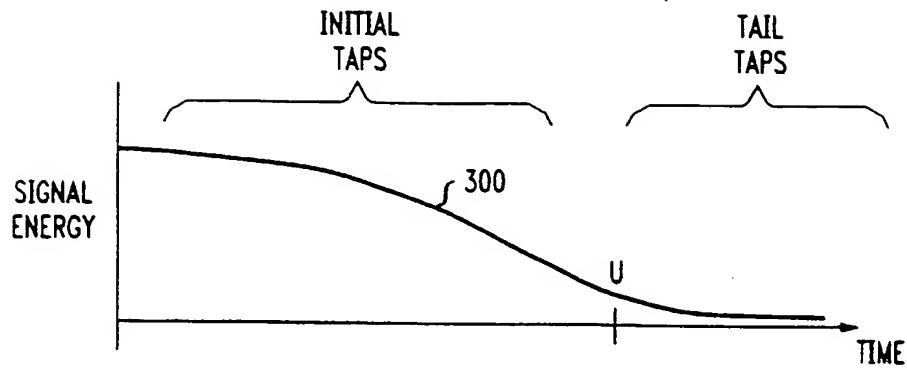


FIG. 4



500 *FIG. 5*

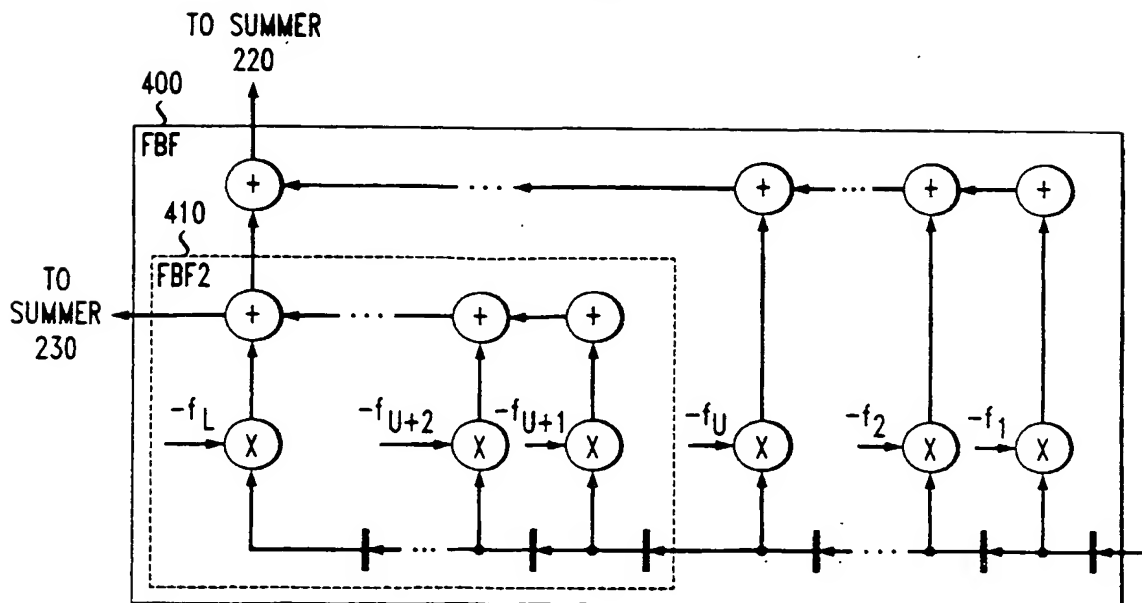